



# Instructions

## ***JEEP JK VERSATABLE***

---

Thank you for purchasing the JK VersaTable from AAL! We greatly appreciate your trust in our company. We take that purchase and your commitment to us very seriously. If you have any questions along the way, please don't hesitate to give us a call at 385.202.4188.

## Installation Video



To aid your install, we have created an install video that can be seen on our YouTube channel. You can scan the QR code to go directly to the video. The video URL is - [Jeep JK VersaTable Install | American Adventure Lab](#)

Please read the instructions thoroughly before starting this project.

### **Tools Required:**


There is more than one tool for every job, but below is the list of tools we use for this installation.

- 2.5M Allen Wrench
- 7M Wrench or Socket
- #2 Phillips Screwdriver

### **Step 1: Remove Rear Tailgate Vent**

The brackets that are not attached to the table when you unpack your box are the brackets that will go inside the shell of the JK tailgate. To gain access to the inside cavity of the JK tailgate, it is necessary to remove the air vent(s) from the back of the tailgate. Depending on the year or your JK, the diagram below may or may not directly resemble your tailgate. This step may require temporary removal of your tire carrier or spare tire delete.



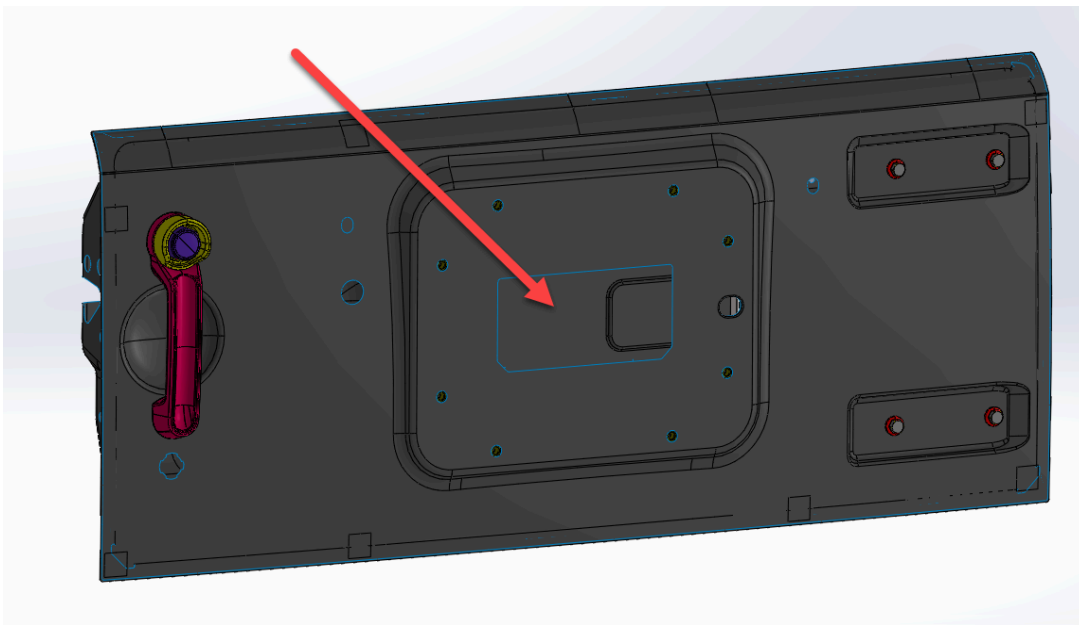


## **Step 2: Insert Internal Brackets**

Now that you have direct access to the inside cavity of your tailgate, you can insert the internal brackets into the tailgate hollow cavity.

The brackets will be oriented as shown below. The view you see in the diagram below is as if you were looking at the rear of the tailgate. The tailgate is hidden in the diagram below to make the illustration more clear.

For this step, it is simple enough to just get the brackets in there and loosely oriented in the correct orientation. We'll install those brackets in the next step. The bracket identified with the "L" goes on the left side, as you were looking at the rear of the tailgate. The "R" goes on the right side, as shown below.

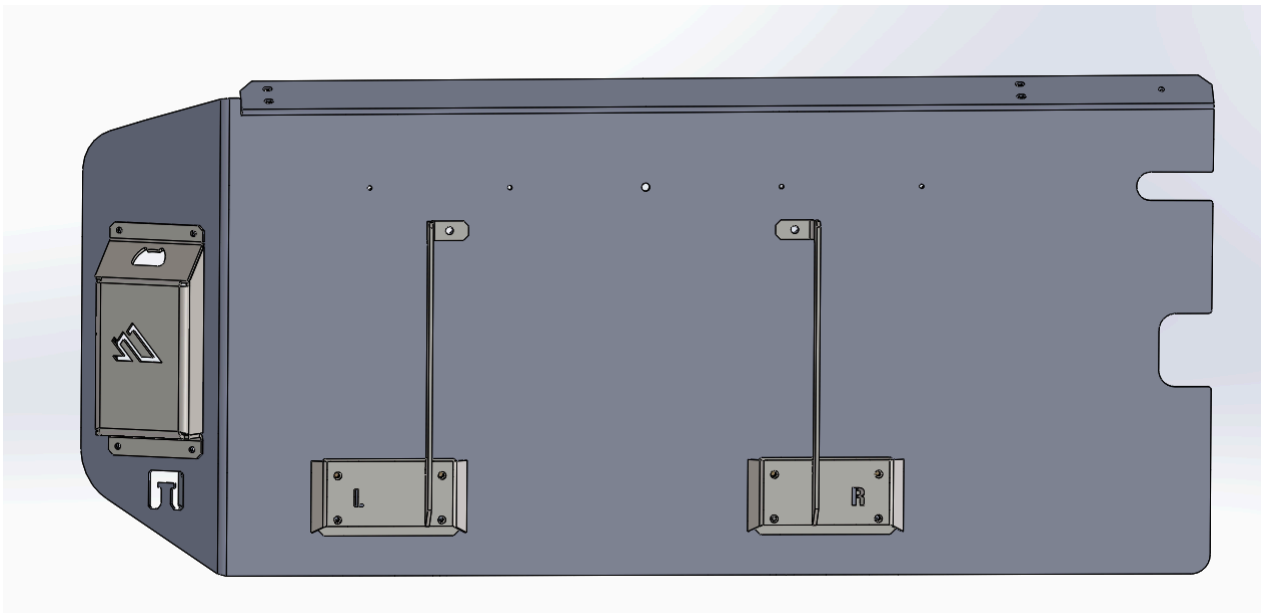


### **Step 3: Install Mounting Bolts**

If you have an extra set of hands available, this is the time to bribe them for some help. It can be done solo, but it will require some stretching.

Align the tailgate table with the inside surface of the tailgate paying attention to the location of the brackets on the inside cavity of the tailgate. You should be able to start the two top-most bolts for each bracket first. Those are the easiest to see. Then, you can rotate each bracket slightly to align the two bottom bolts in each bracket.

Using the supplied M4x20 button head bolts, insert each bolt through the base plate, through the tailgate slots, and into the corresponding bracket located on the inside of the tailgate. Loosely install each of the 3 bolts in both of the inner brackets. The bolt positions are identified in the diagram below.

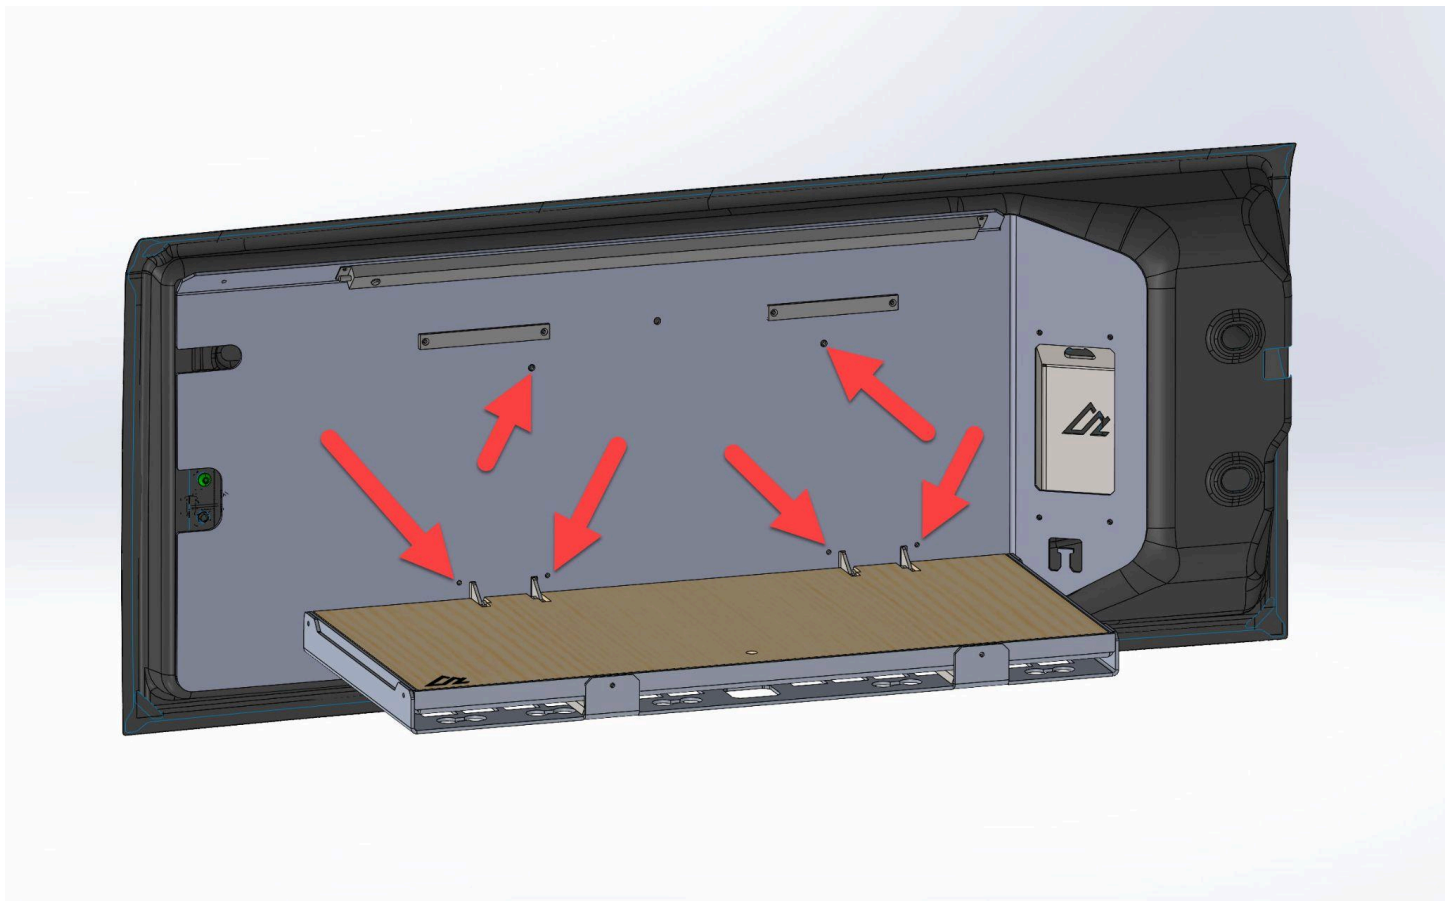

Once all of the bolts have been loosely screwed into their corresponding rivet nuts, you can tighten all of the mounting bolts.

### **Step 4: Wire Your Light**

There are endless possibilities with wiring the LED light. The easiest way is to route the wire for the light along the OEM wires running into the tailgate. The wire for the LED light can be secured to the OEM wires with zip ties. Once

the wire is routed into the vehicle, the easiest connection point is the rear DC socket included on most JK's. If your vehicle does not have a rear DC port, you will need to route a circuit for the light connection.

## **Step 5: Share Your Photos**

We take great pride in building our products and we hope that pride extends to you after installing your platform. If you are able to share your photos online (Facebook and Instagram), please tag **@AmericanAdventureLab** in the photo. We would love to see how it turned out and give you some reciprocal attention in return.

**Congrats! You're all done!**

**Thank you!**

At American Adventure Lab, we strive to improve anywhere we can. If you experience any issues with this product or have any suggestions, please let us know.

If you have any questions or concerns, please don't hesitate to reach out to us at 385.202.4188 or via email at [Sales@AmericanAdventureLab.com](mailto:Sales@AmericanAdventureLab.com).

