



Instructions

JEEP JL-JT FENDER RETENTION HARDWARE

Thank you for purchasing your Jeep JLL/JT Fender Retention Hardware from AAL! We greatly appreciate your trust in our company. We take that purchase and your commitment to us very seriously. If you have any questions along the way, please don't hesitate to give us a call at 385.202.4188.

****Please read all instructions carefully****

****This product functions as a reinforcement kit for the stock fenders of your Jeep****


Tools Required:

- Nutcert Installation kit/drill
- 4mm Allen key

What's included:

Parts/Hardware

- Fender Retention Washer (22):



- M6 Rivnut (22):



- M6x20mm Button Head Flange Bolt (22):



Step 1 - Remove Factory Fenders

Both the Jeep JL and JT factory fenders are held into place using white plastic clips (shown below for clarity).





Compress the triangle shaped extrusion and remove all of these clips on both sides of the vehicle as well as the fenders. Your vehicle should appear as follows:



Step 2 - Install the Rivnuts

There are 10 nutcert locations we need to install the hardware in. The locations are circled below.


Note: If you plan on installing our inner fenders for you vehicle the following four pointed locations in the second image will not need nutcerts as they will be included in the bracket of the fenders.

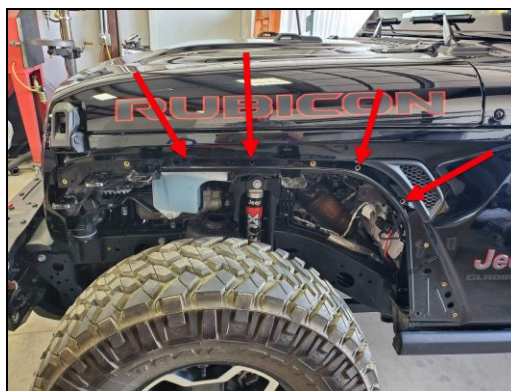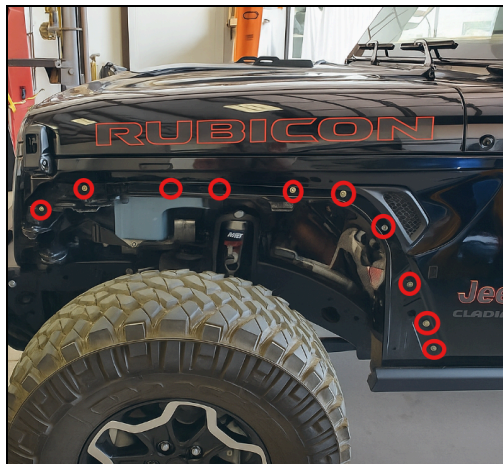

These rivnuts are to be installed through the front face of the fender flange.

Step 3 - Re install the Fenders with the Reinforced Hardware.

You will need the help of a friend to re-install the fenders. Have your friend hold the fender in its factory location, flush against the flange. To Re-install the fenders, find one of the rivnut locations and place the provided retention washers into the notches in the fender lining where the clips once sat. Then place a **M6x20mm Button Head Flange Bolt** and fasten the washer into the rivnut with the fender sandwiched between the washer and flange. Repeat this for all 10 rivnuts on both sides.

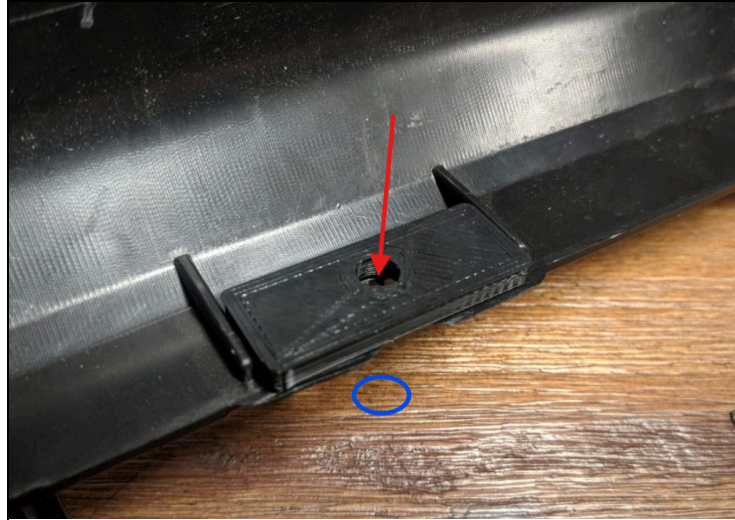

Share Your Photos!

We take great pride in building our products and we hope that pride extends to you after installing your JL/JT Fender Retention Hardware. If you are able to share your photos online (Facebook and Instagram), please tag **@AmericanAdventureLab**. We would love to see how it turned out and give you some reciprocal attention in return!

Congrats! You're all done!

Thank you!

At American Adventure Lab, we strive to improve anywhere we can. If you experience any issues with this product or have any suggestions, please let us know.

If you have any questions or concerns, please don't hesitate to reach out to us at 385.202.4188 or via email at Support@erp.adventurelab.com.

